


RCE-1100 *Sharp Scan*

HAND-HELD **LASER** SCANNER

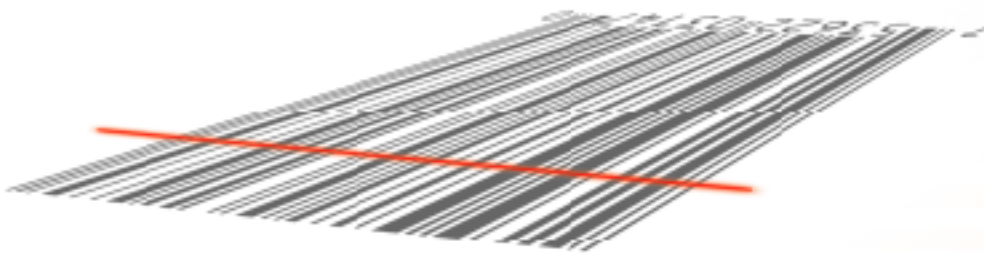

RCE-1100

- High-end laser scan performance
- Sharp aim-and-shoot scanning
- Superior ergonomics for comfortable handle
- Light weight for minimum fatigue
- Streamlined modern design
- Hands-free stand for automatic fixed scanning
- Low power consumption
- Build-in decoder

RCE S.r.l. - Via Salvatore Calenda, 8A - 84126 SALERNO - ITALY
Tel. 089 252625 - Fax 178 2726634 - www.rce.it - e.mail vendite@rce.it

RCE-1100

- ▲ High-end laser scan performance
- ▲ Sharp aim-and-shoot scanning
- ▲ Superior ergonomics for comfortable handle
- ▲ Light weight for minimum fatigue
- ▲ Streamlined modern design
- ▲ Hands-free stand for automatic fixed scanning
- ▲ Low power consumption
- ▲ Build-in decoder



Performance Characteristics

Light Source:	650 nm visible laser diode
Scan Rate:	36 scans per second
Scan Pattern:	Single scan line
Minimum Bar Width:	0.1 mm (4 mil)
Depth of Scan Field:	0 ~ 50 mm (0 ~ 2 inches) for 5 mil 0 ~ 200 mm (0 ~ 8 inches) for 13 mil 0 ~ 254 mm (0 ~ 10 inches) for 20 mil 0 ~ 300 mm (0 ~ 12 inches) for 40 mil
Print Contrast Minimum:	25% minimum reflective difference
Scan Angle:	40 degree
Indicator (LED):	Red
Beeper Operation:	8 tones or no beep
Interface Supported:	Keyboard Wedge, RS232, USB
Decode Capability:	EAN-13, EAN-8, UPC-E, UPC-A, Code 39, Code 93, Code 128, Codabar, Industrial 2 of 5, Interleaved 2 of 5

Physical Characteristics

Dimensions:	61 x 125 x 150 mm (2.4 x 5 x 6 inches)
Weight:	130 g (without cable)
Current Consumption:	140 mA
Cable:	1.8 m (6 feet) removable straight cable

User Environment

Operating Temperature:	0 to 40 °C
Storage Temperature:	-40 to 70 °C
Humidity:	5% to 95 %